


DIN RAIL BOX FOR RELAY SWITCH



TIME SAVING

The Roller Shutter Module can now be installed directly on the electrical panel

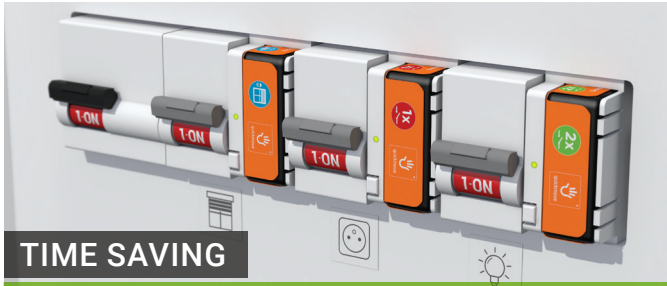

NO CONSTRUCTION WORKS

Thanks to the Relay Switch 2 Channels and the EnOcean® Wall Switch there's no need to lay cables to create a back and forth or to install wired wall switches



EASY INSTALLATION

I install the Relay Switch 1 channel dry contact directly on the electrical panel to turn the towel dryer connected



Installation example, Relay Switch sold separately.

COMPATIBLE ENOCEAN® RELAY SWITCHES



Relay Switch 1 Channel Dry Contact
SIN-2-1-XX



Relay Switch 2 Channels
SIN-2-2-XX



Roller Shutter Module
SIN-2-RS-XX

TECHNICAL SPECIFICATIONS

Compatible Relay Switches: SIN-2-2-XX, SIN-2-1-XX, SIN-2-RS-XX

Compatible DIN Rail: Type Ω EN 50022

Maximum intensity: 10A

Protection factor: IP20

Dimension: 87x27x58 mm

CERTIFICATIONS AND STANDARDS - EUROPE

Directive low voltage LVD 2014/35/EU

Directive RoHs 2011/65/UE

Directive DEEE 2012/19/UE

EN 60669

EN 60669-2-5

PRODUCT REFERENCE

DRB-1-1-00 - EAN: 3700313924167

